
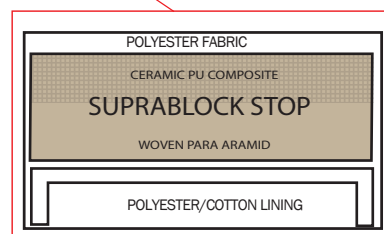


# PUNCTURE ASSEMBLY BLACK

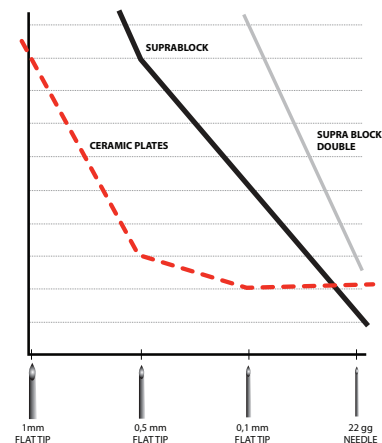

Name	PUNCTURE ASSEMBLY BLACK	Art. No	PAB
<b>Glove purpose</b>	Inspection / under glove for needlestick and cut resistance CE cat II EN388:4543	<b>Glove thickness</b>	Back of hand: 0,6 mm Palm: 1,4 mm
<b>Materials</b>	Quick dry polyester, polyester/cotton lining, SupraBlock Stop fabric (Para aramide with ceramic composite coating)	<b>Grip</b>	Nitrile dots for improved grip
<b>Fitting</b> <small>(elastic tight, tight, close, loose)</small>	The glove has a close fit	<b>Breathing</b>	The palm has no breathing, lining transport moisture to the sides where it can be evaporated.
<b>Abrasion</b>	Very high resistance to abrasion by SupraBlock4u	<b>Disposal</b>	No special waste
<b>Cut</b>	Palm and finger tips has SupraBlock Stop (EN388 cut IV5)	<b>Storage and cleaning notice</b>	No washing, store in cool, dry and dark place.
<b>Tear</b>	A very high tear resistance is making the glove dangerous for entangling.	<b>Chemical safety</b>	Reach compliance
<b>Heat and insulation</b>	Glove provide limited insulation but is not heat resistant or suitable for contact with heated objects.	<b>Colour</b>	Black
<b>Water/Oil</b>	Not water/oil resistant	<b>Size</b>	Available sizes 7-11
<b>Puncture</b>	Very high puncture(1,0mm flat tip) and needle (0,1mm flat tip) resistance and high hypodermic needle resistance (not cut or puncture proof)	<b>Packaging</b>	1 pair per bag. 12 pairs per carton
<b>Impact</b>	No protection	<b>Classification</b>	EN388 4543 CE CAT II
<b>Suitable industries</b>	Waste handling, Cleaning, Security		

PROTECTION LIMITS AND COMMENTS

2013-10-24